



**DIVING SYSTEMS INTERNATIONAL, Inc.**

425 Garden Street  
 Santa Barbara, California 93101  
 Telephone (805) 965-8538, Fax (805) 966-5761  
 www.divingsystems.com Email: Info@DivingSystems.com

**Bulletin 2 of 2000: Change to Product.**  
**3 Aug, 2000** (revision of Bulletin 1 of 1999)

**Subject: Change of Yoke**

**Products Affected: Yokes for the SuperLite 17 A/B & MK 21 Helmets**

DSI is replacing the existing fiberglass yoke, DSI Part Number 520-060, with a new yoke, **DSI Part Number 520-117** (no price change). The new yoke is made of a durable black polyurethane, molded around a stainless steel core, and is slightly heavier than the fiberglass. This yoke will become standard equipment on all SuperLite 17 A/B & MK 21 helmets produced as of June 15, 1999.

The new yoke is **fully retrofittable** with the fiberglass unit it replaces and is readily retrofittable to all SL-17 A/B helmets. The only difference is that the three stainless washers, (DSI Part Number 530-530 - location number 30 on the exploded view), used on the fiberglass yoke hinge installation are **NOT USED** on the polyurethane yoke hinge installation. Discard these washers responsibly as they pose a choking hazard to small children and pets.


**New Part Number**

**520-117**

**Old Part Number**

**520-060**

The fiberglass yoke will remain available as a **special order** spare part.

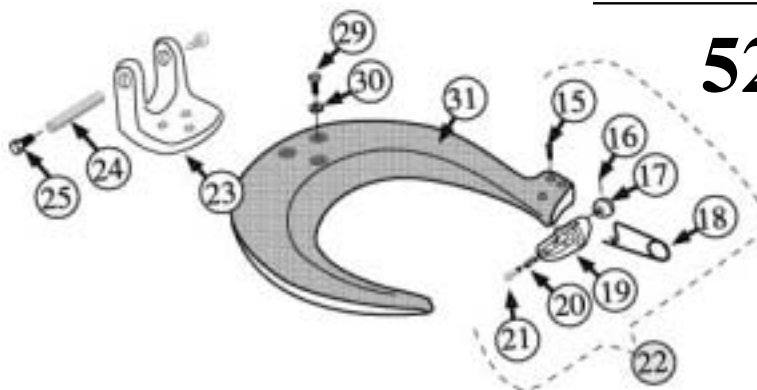

**Note:** There is no change of part number for the neckclamp / yoke assembly, 505-008 which is also now standard with the new black polyurethane yoke. No Price Change.